

GOSAFE

G616

FEATURE RICH LTE TRACKER



APPLICATION



Fleet
Management



Food & Beverage
Delivery Fleet



Government &
Public Safety



Agriculture

Gosafe®

your trusted partner

G616

FEATURE RICH LTE TRACKER

KEY FEATURE

- > LTE CAT-1/2G Modem version
- > Crash Data up to 100Hz with 4Hz GPS update
- > BLE 4.2 for Wireless Sensor(coming soon)
- > WIFI Location where GPS is not available(coming soon)
- > 200 Hardware based Geo-Fences
- > Driving Behavior
- > 1-Wire Interface
- > Multiple Input & Outputs
- > Serial Port for external peripheral
- > Internal Backup Battery



YOUR BENEFIT

- > Get visibility of fleet and driver
- > Improves efficiency and productivity
- > Reduces fuel and operational expenses
- > Increases driver safety



The full-featured device with innovative technology

G616 is designed for service providers, integrators, and enterprise customers to enhance mobile resources and improve their dispatch system; the G616 is a dependable LTE CAT-1 and 2G tracking device, delivering the key features fulfilling the most demanding applications: fleet management, insurance telematics, dispatch, vehicle location and recovery, and more

Features



4G connectivity with fallback 2G



WiFi Location



Bluetooth 4.2 for sensor



Multiple interface for various monitoring and control



Configurable digital inputs and analog inputs



Driver behavior monitoring

SPECIFICATIONS

GENERAL

Communication Mode	LTE/GPRS and TCP/UDP/SMS
Location Technology	56 Channels GNSS
Operating Voltage	12 and 24 Volt Vehicle Systems

CELLULAR

Data Support	SMS, TCP, UDP
LTE CAT-1	B1/ 2/ 3/ 4/ 5/ 7/ 8/ 12/ 13/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 66
LTE Power	Class 5 (20dBm)
LTE Data	CAT-1: DL: 10Mbps, UL: 5Mbps
GSM/3G	850/900/1800/1900 Mhz
GPRS Power	Class 10
SIM Card	1.8/3.3V

INTERFACE

Digital Inputs	2 Digital inputs
Ignition Sense	One dedicated wire for Ignition
Programmable Input	One configurable input to negative trigger digital input or analog input
Analog Input	One dedicated analog input
Digital Output	Two digital outputs, open drain, 300mA drive current max
Latched Digital O/P	One digital output with internal latch circuit,open drain, 150mA drive max
Two-way Audio	2 differential outputs; 1 audio input
Serial Port	1 RS232/485 port for external devices
1-Wire Solution	1 wire interface (Driver ID)
Status LEDs	GPS, Cellular, Power
BLE 4.2	for Wireless Sensor

CONNECTORS, SIM CARD ACCESS

Connector Type	16 Pin Molex
Mini USB	1 Mini USB (configuration/debug)
Power Switch	Device Power ON/Off Switch
GPS Antenna	Internal
GSM Antenna	Internal
SIM Card	Internal (4FF)

ON BOARD


CPU	ARM Cortex M3
Flash Memory	4Mbit (8000 records)
3D Accelerometer	On Board

GPS

Location Technology	GPS Engine
	GPS/Glonass/Galileo/BeiDou
	GPS/QZSS L1 C/A, Glonass L10F
	BeiDou B1, Galileo E1 B/C
	SBAS L1 C/A: WAAS, EGNOS, MSAS, GAGAN
Concurrent GNSS	3
Update Rate	1 Hz
Channels	56
Tracking sensitivity	-167dBm
Cold Start Open Sky	30S
Aided Start	2S
Reacquisition	1S
Assisted GPS	Supported
Antenna	Patch Internal

ELECTRICAL

Operating Voltage	8-40V DC operational for 12V & 24V
	Vehicle support per SAE J1455
	3mA 12V (Sleep)
Power Consumption	60mA 12V (Power Save)
	120mA 12V (Active Tracking)
Backup Battery	LI-PO 220mAh (Optional)
	Battery Recharging Range is 0 to +45°C

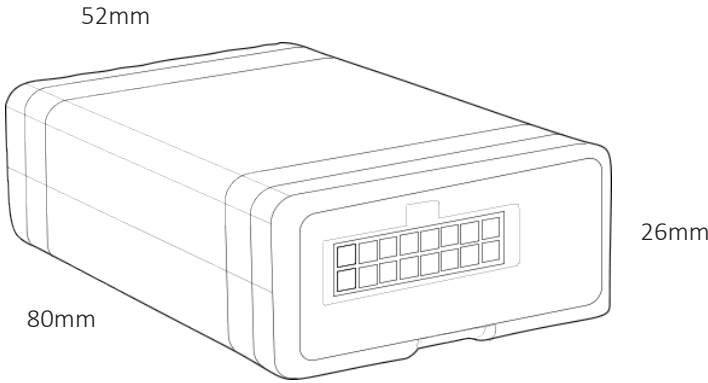


PHYSICAL

Dimensions	80(L) x 52(W) x 26(H)mm
Weight	80g (Without Battery)

ENVIRONMENTAL

IP Rating	IPX2
Operating Temperature	-40 ~ +85°C (without Backup Battery)
	-10 ~ +50°C (with Backup Battery)
Humidity	95%RH @ 50°C non-condensing
Shock & Vibration	U.S. Military Standards 202G and 810F, SAE J1455
EMC/EMI	SAE J1113; FCC–Part 15B
RoHS	Compliant (Optional)

Applications

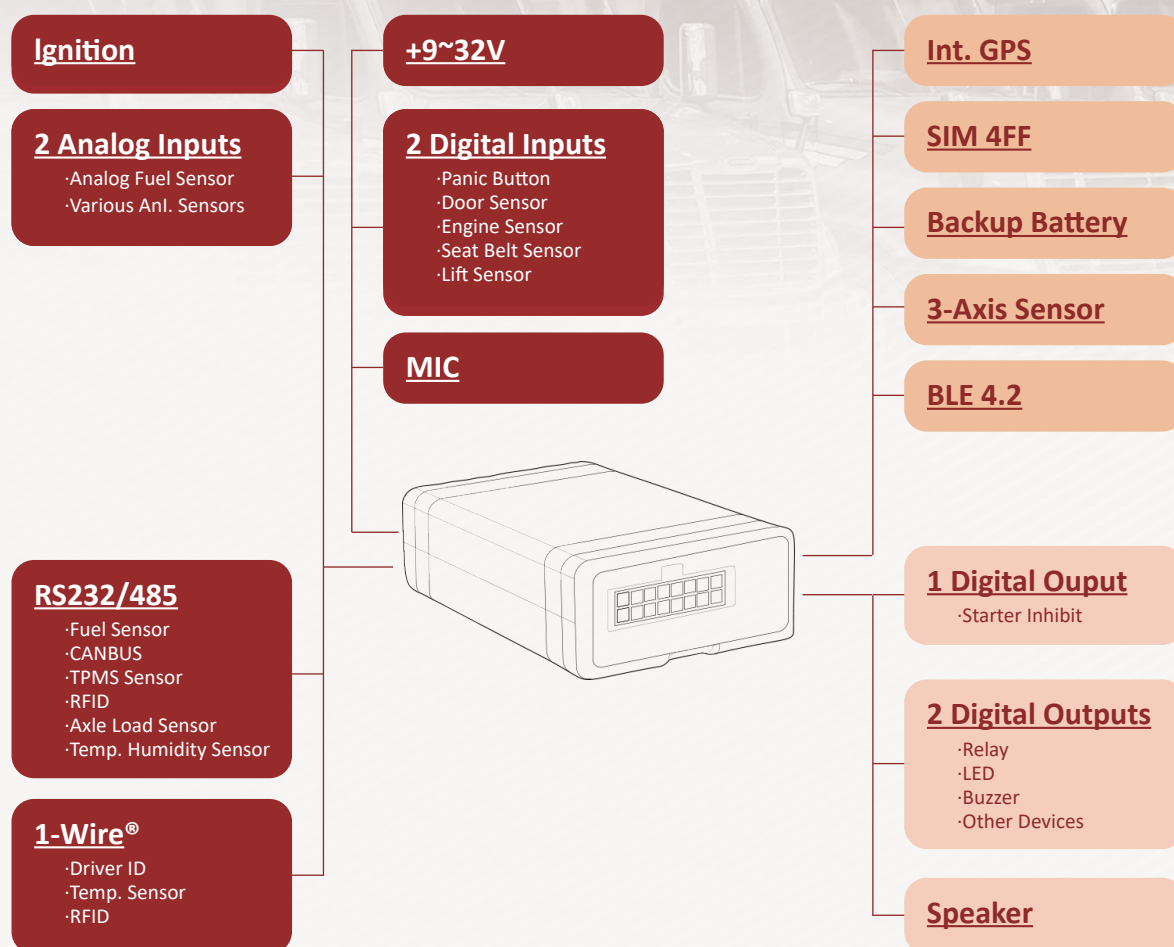

Ordering Models

Model	Connectivity	Region
G616-LTA	LTE CAT-1	LATAM Version
G616-LT	LTE CAT-1	EMEA-ANZ Version
G616-LTE	LTE CAT-1	NA Version
G616	2G	Global

Gosafe Company Limited

+86 (20) 8200-6896

info@gosafesystem.com

www.gosafesystem.com

RM C1-1103-1104, Innovation Building, No.182 Kexue Ave.,

Science & Tech City, Guangzhou-510663, China